



(19)

(11) Publication number:

**04096222 A**

Generated Document.

**PATENT ABSTRACTS OF JAPAN**(21) Application number: **02207134**(51) Intl. Cl.: **H01L 21/302**(22) Application date: **03.08.90**

(30) Priority:

(43) Date of application publication: **27.03.92**

(84) Designated contracting states:

(71) Applicant: **FUJITSU LTD**(72) Inventor: **AOYAMA ATSUYUKI**

(74) Representative:

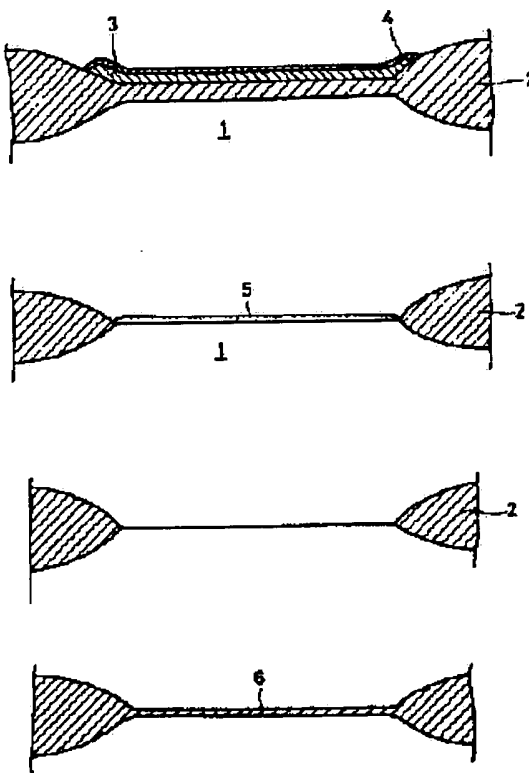
**(54) MANUFACTURE OF SEMICONDUCTOR DEVICE**

(57) Abstract:

**PURPOSE:** To perform etching of an Si oxide film and an Si nitride film by a dry method without damaging a substrate by etching the Si oxide film and the Si nitride film by exposing these to F-group gas containing specific atoms, and mixed gas of aforesaid F-group gas and H<sub>2</sub>O, H<sub>2</sub>.

**CONSTITUTION:** Etching of an Si oxide film 3 and an Si nitride film 4 is performed by exposing these to F-group gas containing F-atoms of HF, F<sub>2</sub>, XeF<sub>2</sub> and to mixed gas of aforesaid F-group gas and H<sub>2</sub>O, H<sub>2</sub>. Etching of a nitride film, an oxide film is performed according to an etching property, thickness of semiconductor constitution materials such as single Si, polySi, a nitride film, an oxide film and the kinds of F-group gas, and the materials around them are made to remain. During an etching process, ultraviolet light is directly applied to F-group gas or a substrate 1. After the etching process, annealing is performed. After etching or annealing processes, again a film 6 is formed. Directly before finishing the etching process, F-group gas is changed to F-group gas having low etching speed of the semiconductor substrate.

COPYRIGHT: (C)1992,JPO&amp;Japio

**BEST AVAILABLE COPY**